




Fábrica de Cables de acero y eslingas /  
Accesorios / Elementos de izaje

## Cadena Galvanizada

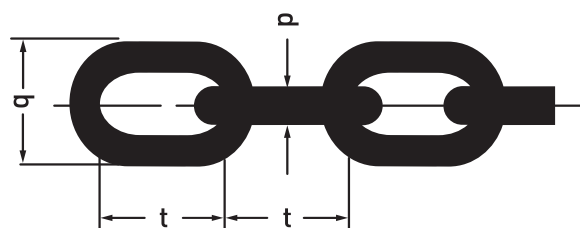

| DIÁMETRO | LONGITUD INTERNA | ANCHO EXTERNO | PESO POR 100M | CARGA DE PRUEBA | CARGA DE ROTURA | KILOGRAMOS POR BOLSAS |
|----------|------------------|---------------|---------------|-----------------|-----------------|-----------------------|
| d        | t                | b             | KG            | KGF             | KGF             |                       |
| MM       | MM               | MM            |               |                 |                 |                       |
| 3        | 16               | 12            | 16.5          | 114             | 285             | 12.5                  |
| 3.5      | 18               | 14            | 22.5          | 153             | 392             | 12.5                  |
| 4        | 19               | 16            | 30            | 204             | 509             | 12.5                  |
| 4.5      | 20               | 18            | 39.5          | 254             | 641             | 12.5                  |
| 5        | 21               | 20            | 50            | 321             | 789             | 12.5                  |
| 5.5      | 23               | 22            | 60.5          | 387             | 967             | 12.5                  |
| 6        | 24               | 24            | 73            | 458             | 1171            | 12.5                  |
| 7        | 28               | 28            | 100           | 611             | 1527            | 25                    |
| 8        | 32               | 32            | 130           | 814             | 2036            | 25                    |
| 9        | 36               | 36            | 165           | 1018            | 2545            | 25                    |
| 10       | 40               | 40            | 205           | 1272            | 3155            | 25                    |
| 12       | 48               | 48            | 290           | 1832            | 4580            | 25                    |
| 13       | 52               | 52            | 345           | 2158            | 5395            | 25                    |

DIN 5685A

\*KGF= kilogramos fuerza